


Prosport Inc. Amber Digital Clock

Smoke Series

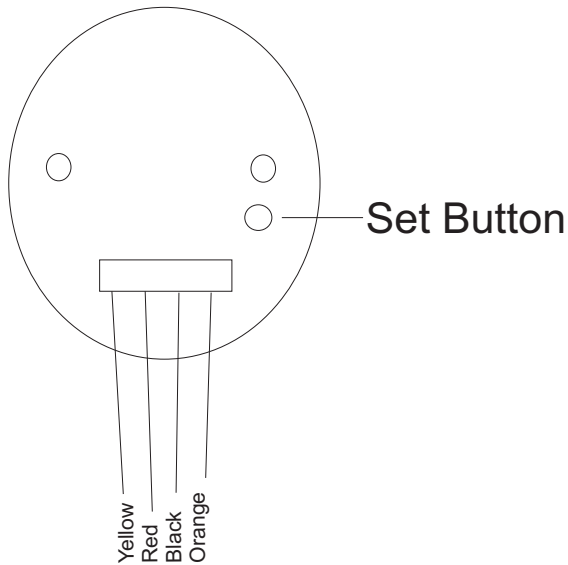

Wiring Instructions

Red- 12V Accessory power
Black - Ground
Yellow- 12v Constant power
Orange- Dimmer Switch 12v.

Notes

Opening Ceremony:

When Ignition is switch on, the Clock will Display an opening ceremony and end ceremony. 30pcs Bar LED's will scan once. Digits will run back and forth between 0-9 once.

Time set Function:

Hour setting~

-Hold the <Set button> on the back of the gauge for 3 seconds to enter time mode.
-When the first two digits are flashing, Press the <set button> to set the hour.
Range is from 0-12.

Minute Setting~

-After the hour setting is complete, Hold the <set button> for 3 seconds to set the min.
-When the last two digits are flashing, press the <set button> to set the min. Range 0-59

Note- once the time is set. Let the clock sit for 10 sec and it will return to normal mode.

A. Display: 12 Hours

B. Style: Hour/ Minute/ Second

C: Gauge display: 12 Hours
LED: 0-60 Seconds

*Note. Please be sure not to over tighten the screw..

