

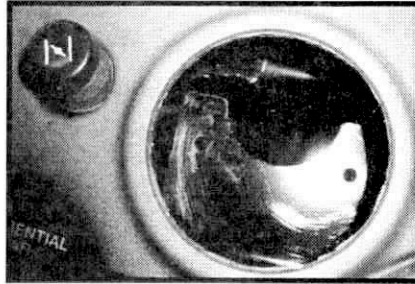
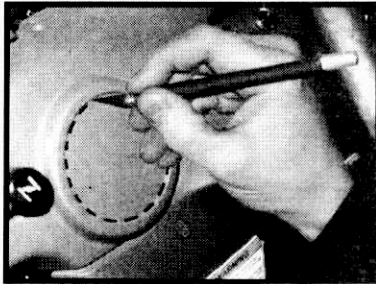


Kawasaki Motors Corp., U.S.A.


Thank you for your purchase of an electric speedometer for your **Kawasaki Mule** vehicle. Please follow the instructions outlined below to properly install this product.

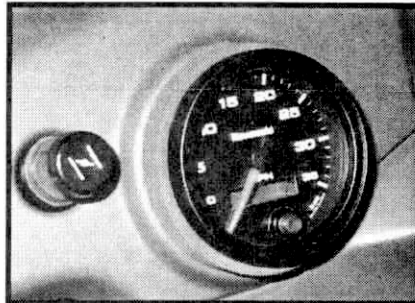


- 1.) Using a pen knife, carefully cut out the molded 2 5/8" mounting hole for the speedometer in your vehicle's dashboard. See image at left for mounting point location and surface to be removed.

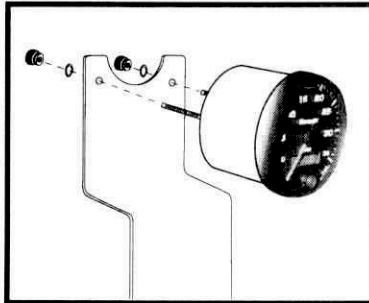


- 2.) Slide speedometer into the mounting hole from the front side of the dashboard. Align mounting studs with mounting bracket behind meter. Attach with provided hardware.

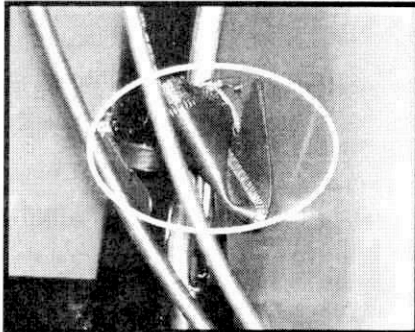

- 3.) Locate bagged speedometer harness connector zip-tied to dash support bar shown in picture. Carefully remove bag and plug connector into speedometer case.

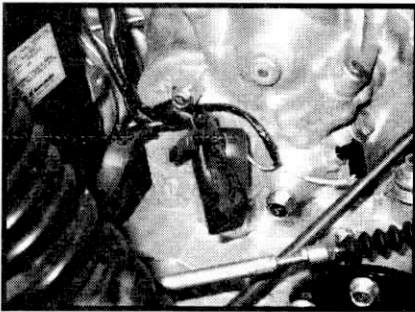

- 4.) Trace harness to other bagged connection near vehicle transmission. See image at left. Remove bag and connect plug to supplied vehicle speed sensor.

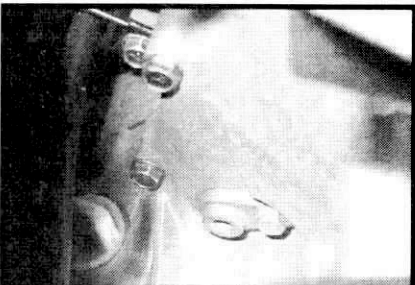

- 5.) Install speed sensor into right side of transmission case as shown. Use grommet provided to seal speed sensor to transmission case. Start vehicle and check for proper instrument operation. Installation is now complete.

ACCESSORIES