



RESONATOR DELETE KIT

(2015-2020 MUSTANG GT)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Resonator Delete Pipe
- (2) Exhaust Clamps

TOOLS REQUIRED

- Jack
- Jack Stands
- Marker
- Reciprocating Saw
- Socket Wrench
- 13, 15mm Sockets
- 13, 15mm Wrench
- Torque Wrench

SKU # 408100



STEP 1

Raise and support the vehicle to gain access to the factory resonator.




STEP 2

Use the step down on the front of the pipe as a reference point. Align the resonator delete with the factory resonator. Mark where the factory pipe will need to be cut.



STEP 3

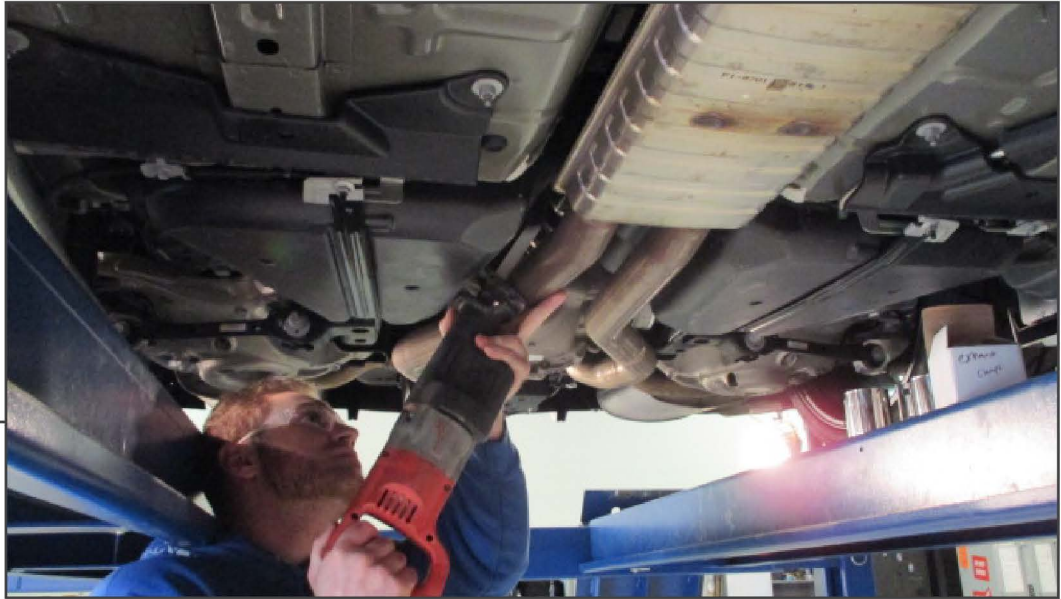

Carefully cut the factory exhaust so that you don't hit the driveshaft or fuel tank with the blade.
**Always use eye protection.


STEP 4



Loosen the factory exhaust clamps at the front of the resonator. Then remove the resonator from the vehicle. The factory exhaust clamps will be reused.




STEP 5

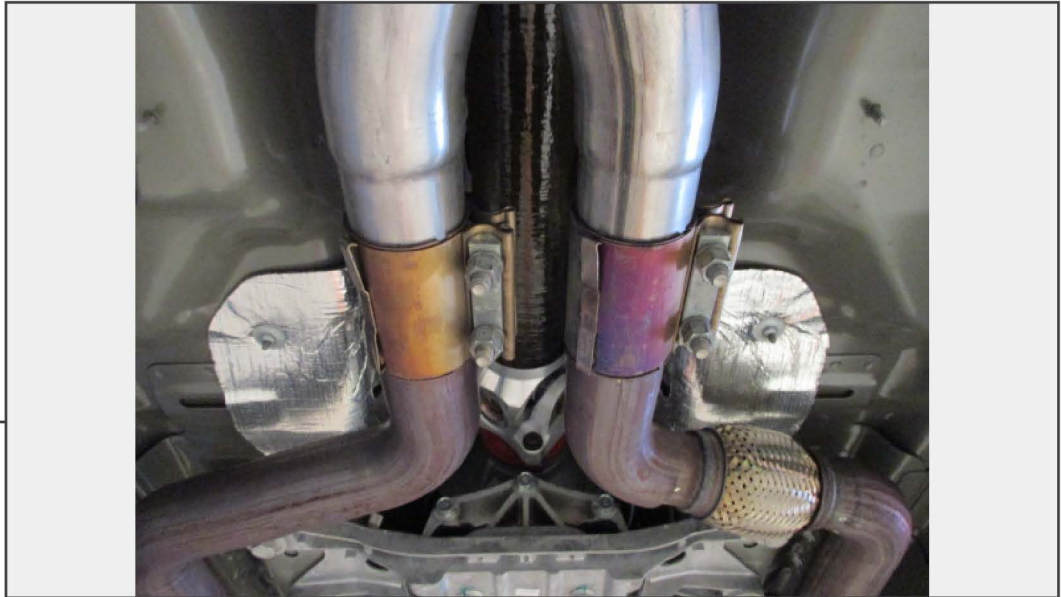

Secure the resonator delete pipe to the vehicle using the factor clamps.

STEP 6

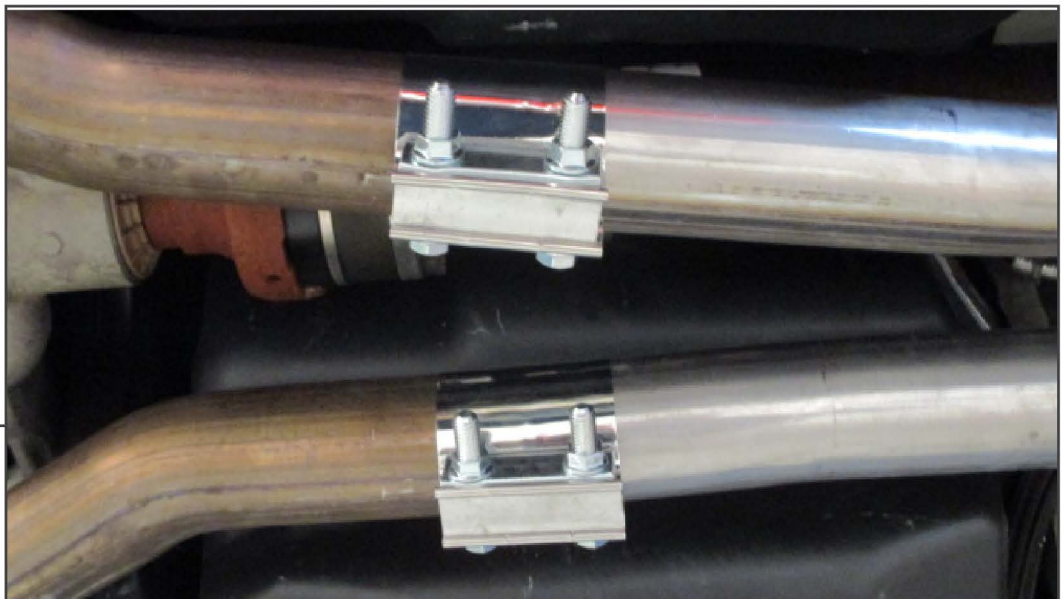

Using the supplied exhaust clamps, secure the resonator delete to the rest of the exhaust. Torque clamps to 42 ft. lbs. Installation is now complete.