

REAR DIFFUSER

(2015-2017 MUSTANG GT/V6/ECOBOOST PREMIUM)

INSTALLATION INSTRUCTIONS


CONTENTS

(1) Rear Diffuser

TOOLS REQUIRED

Trim Panel Removal Tool 7mm Socket & Ratchet Flat Head Screw Driver Dremel or other Cutting Tool



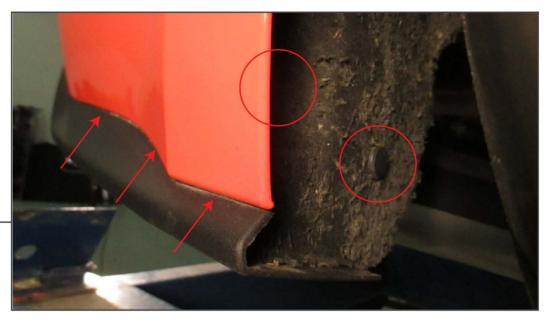

Support the rear of the vehicle so you can access the underside of the bumper. Remove (2) fender liner clips, on each side, to gain access to the (3) 7mm bolt holding the lower bumper trim to the bumper.



STEP 2

Remove the (2) push clips and (2) 7mm screws securing the factory diffuser to the vehicle.





Disconnect the reverse light plug. Gently pull the bottom of the bumper down to access the (4) 7mm screws securing the 3rd brake light to the bumper. Remove the light from the vehicle, reverse light and hardware will be reused.



STEP 4

The lower bumper trim is attached to the bumper via plastic clips. You should be able to pull this off relatively easily. If the trim doesn't release easily, it may be helpful to use a large flat head screw driver to flex/release the clips on the back side of the bumper.





Once the lower trim panel is removed from the bumper, the factory diffuser will need to be cut from the bumper. Do this by cutting along the dotted lines shown above.



STEP 6

Install the Saleen diffuser on to the lower bumper trim using the factory clip locations. Ensure the diffuser is fully clipped into the bumper trim before continuing.





Reinstall the factory reverse light. Then, reinstall the lower bumper trim/diffuser assembly using the same factory hardware.