



SIDE ROCKER SPLITTERS

(2015-2020 MUSTANG)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Rocker
- (1) RH Rocker
- (20) White Rocker Clips
- (1) LH Winglet (GT500 408768 Only)
- (1) RH Winglet (GT500 408768 Only)
- (20) Self-Tapping Screw (GT500 408768 Only)

TOOLS REQUIRED

- Soft Pry Tool
- Phillips Head Screw Driver
- Flat Blade Screw Driver

SKU # 408768 408769




STEP 1

Remove the (3) push clips holding the inner fender liner to the rocker panel.




STEP 2

Remove the push clip securing the fender liner to the rear rocker panel. This clip will not be reused.

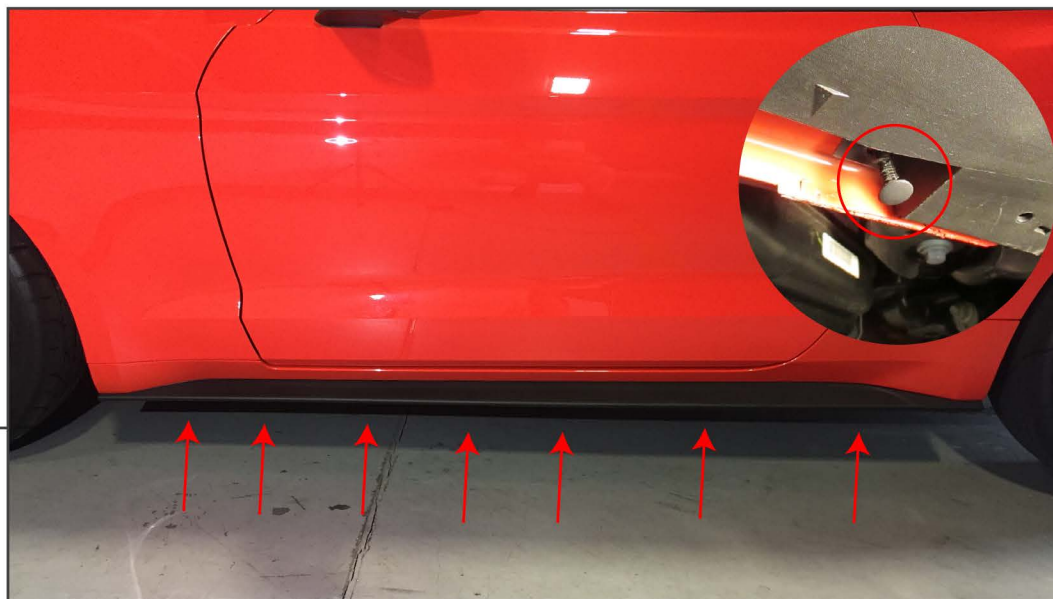

STEP 3

Remove the (7) push clips holding the rocker panel to the underside of the vehicle.

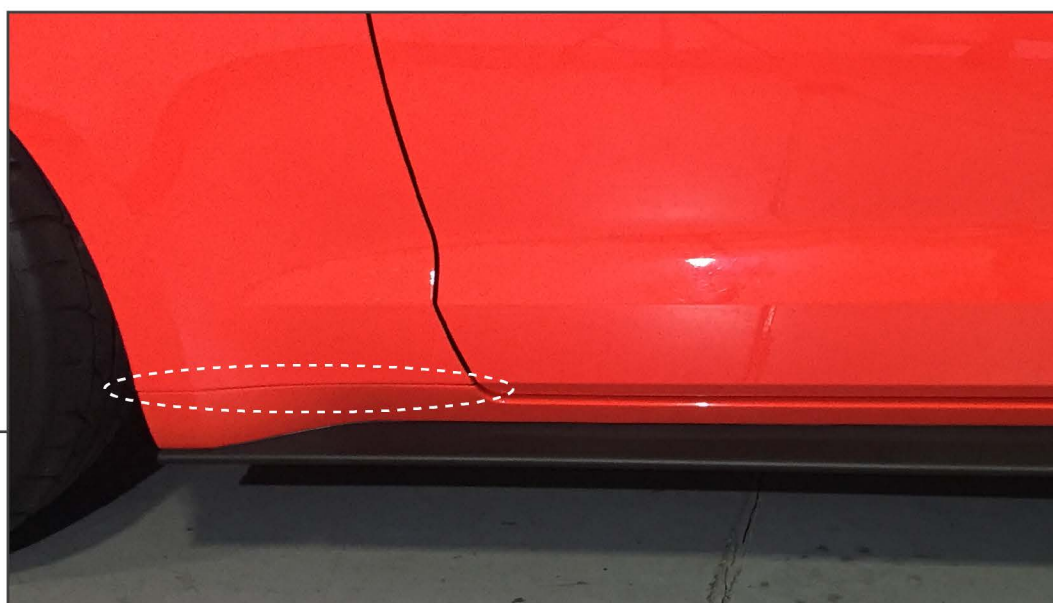

STEP 4

Pull the front edge of the rocker panel away from the fender. The rocker panel is clipped in across the top edge.

STEP 5

Using a soft pry tool, gently pull the rocker away from the rear quarter panel. Depress the sides of the (3) white clips to release them from the vehicle.

STEP 6

Once the top (3) clips are removed, gently pull down on the rocker panel to access the remaining clips. **Note: The panel may pull away from the panel leaving the clips in the rocker panel. The clips will need to be removed in order to reinstall the new rocker panel.

STEP 7



Unclip the textured black portion of the factory rocker panel. The painted portion will be reused.

STEP 8



Install the new GT350 side skirt onto the paint portion removed in step 7.

STEP 9



If you purchased the GT500 side skirt install the additional winglet to the front of the side skirt using the (10) provided self-tapping screws.

STEP 10



Completed GT500 assembly shown. GT350 assembly will not have the additional winglet from Step 9.



STEP 11

Additional clips have been provided to replace any white clips that may have been broken during removal of the rocker assembly.



STEP 12

Reinstall side skirt assembly following Steps 1-6 in reverse order.