



UPPER GRILLE

(2013-2014 MUSTANG)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) Upper Grille Assembly

TOOLS REQUIRED

7mm, 8mm, 10mm Sockets
Ratchet
Panel Removal Tool
Flathead Screwdriver
Side Cutters/Rotary Tool

SKU # 434698



STEP 1

Open the hood. Remove the (8) plastic push clips from the radiator support cover. Remove the cover from the vehicle.




STEP 2

Remove (4) 7mm bolts on each side of the bumper.



STEP 3

From under the vehicle, remove (7) 7mm bolts from the rear of the splash shield.

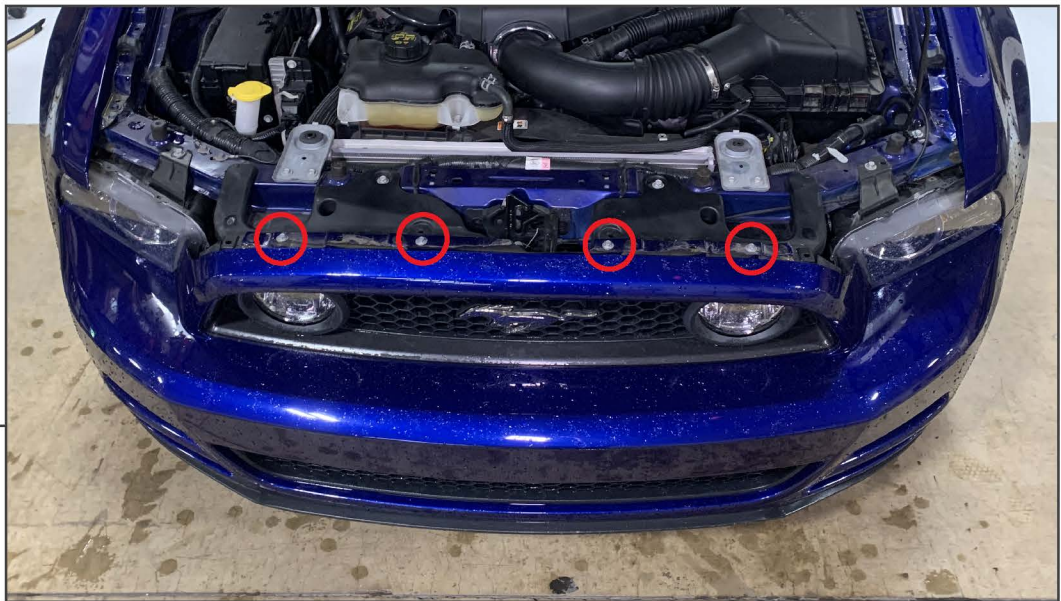

STEP 4

Remove (4) 8mm bolts from the top of the bumper. Pull the bumper away from the vehicle, and disconnect the wiring harnesses from the fog lights, side marker lights, and temperature sensor. Set the bumper aside on a soft surface.

**STEP 5**

Place the bumper on a soft workable surface. Remove the OEM fog lights by removing (3) 7mm screws per light assembly.

Using a flathead screwdriver, pry the mounting plastic tabs around the perimeter of the grille away to release the grille assembly through the front of the bumper.

**STEP 6**

Using side cutters/rotary tool, trim the (3) vertical plastic bars from in between the center and top of the bumper.

STEP 7



Press the new grille into the vehicle through the front, and ensure all the perimeter mounting clips are securely pressed into place.

STEP 8



Re-install the vehicle bumper following steps 1-4 in reverse order.

Installation is now complete.