



WHEEL SPACERS

(2015-2024 MUSTANG)

INSTALLATION INSTRUCTIONS

CONTENTS

(2) Wheel Spacers
(10) Lug Nuts

TOOLS REQUIRED

- Jack
- Jack Stands
- Lug Wrench
- Torque Wrench
- Wire Brush
- Grinder/Cut-off wheel

STEP 1




Raise the vehicle so that the tires are just off the ground. Support the vehicle with jack stands. Using a lug wrench, remove the wheel.

STEP 2




Using a wire brush, clean any loose rust from the axle hub.

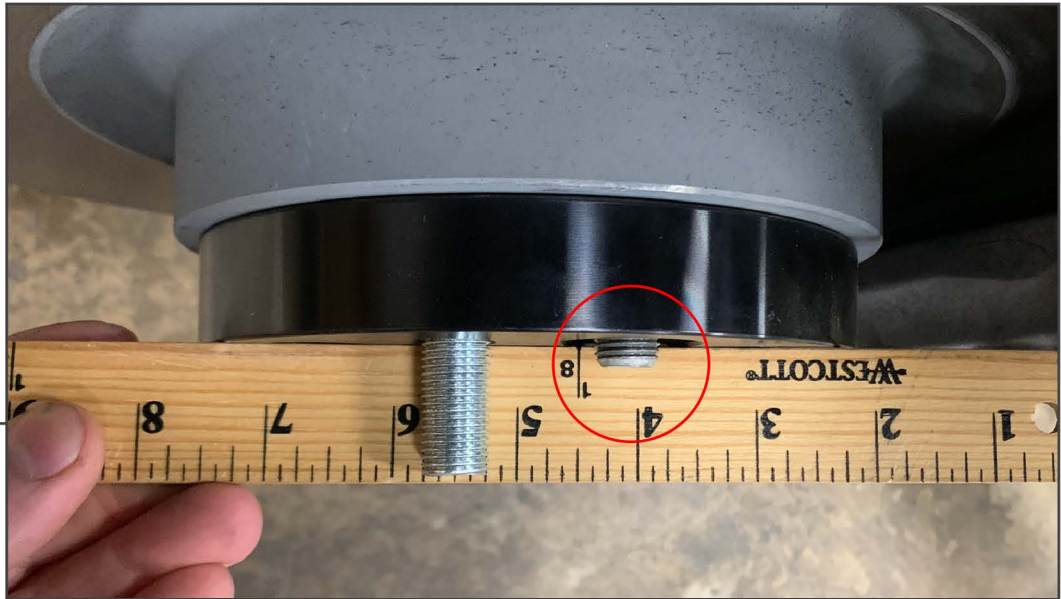STEP 3

Test fit the wheel spacer on the vehicle, ensure that the factory lug stud does not extend beyond the face of the spacer. If the stud extends beyond the face of the spacer, the factory studs will need to be trimmed. Using a grinder or a cut off wheel, trim the factory lug studs to ensure the studs do not extend beyond the face of the spacer. This will allow the wheel to sit flush on the face of the wheel spacer as intended.

STEP 4

Apply a drop of the red thread locker on each wheel stud.

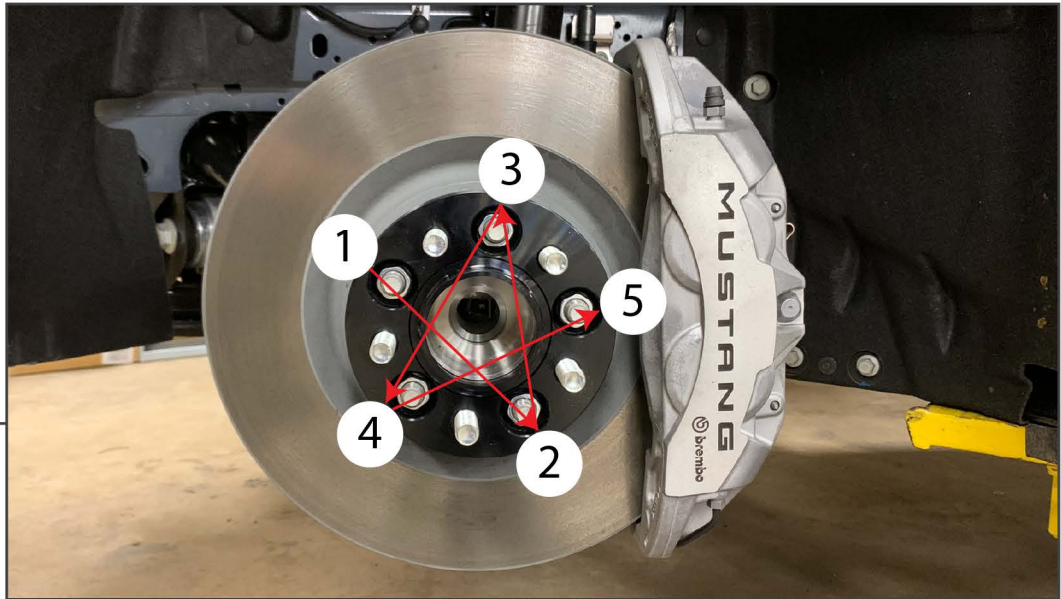

STEP 5

Bolt the wheel spacer to the vehicle. Torque the supplied lug nuts to 150 ft/lbs.



STEP 6

Reinstall the wheel using the original lug nuts. Torque the wheels to the factory torque spec of 150ft/lbs.