

LED COLOR CHANGING AIR VENTS

(2015-2023 MUSTANG - WITH 3-VENT DASHBOARD)

INSTALLATION INSTRUCTIONS


CONTENTS

(3) Air Vents
(1) Wiring Harness
(1) Fuse Tap

TOOLS REQUIRED

Plastic Trim Removal Tool
Small Flathead Screwdriver
Needle Nose Pliers
Wire Stripper/Crimper
8mm Socket
Ratchet

STEP 1

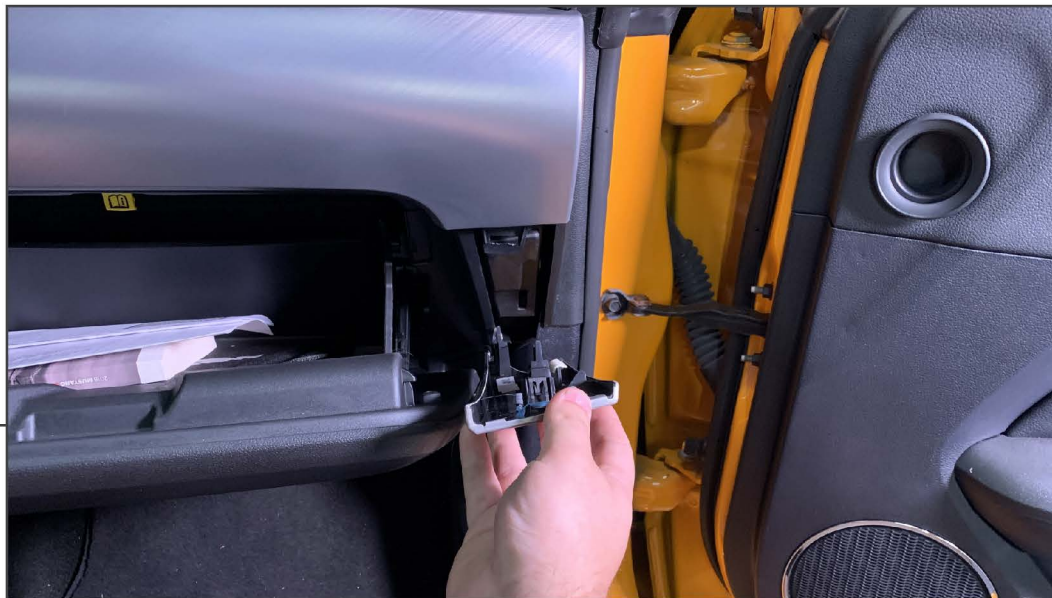


From the passenger side of the vehicle, use a plastic trim removal tool to remove the lower trim panel from the vehicle dashboard. Lower the glove compartment for additional working space. Rock the panel back-and-forth while pulling away from the dashboard to dislodge the clips if necessary.

STEP 2



Using a plastic trim removal tool, gently pry around the perimeter of the upper dash panel to dislodge the retaining clips. Rock the panel back-and-forth while pulling away from the dashboard to dislodge the clips if necessary.

With the dashboard panel removed, place the panel on a soft working surface.

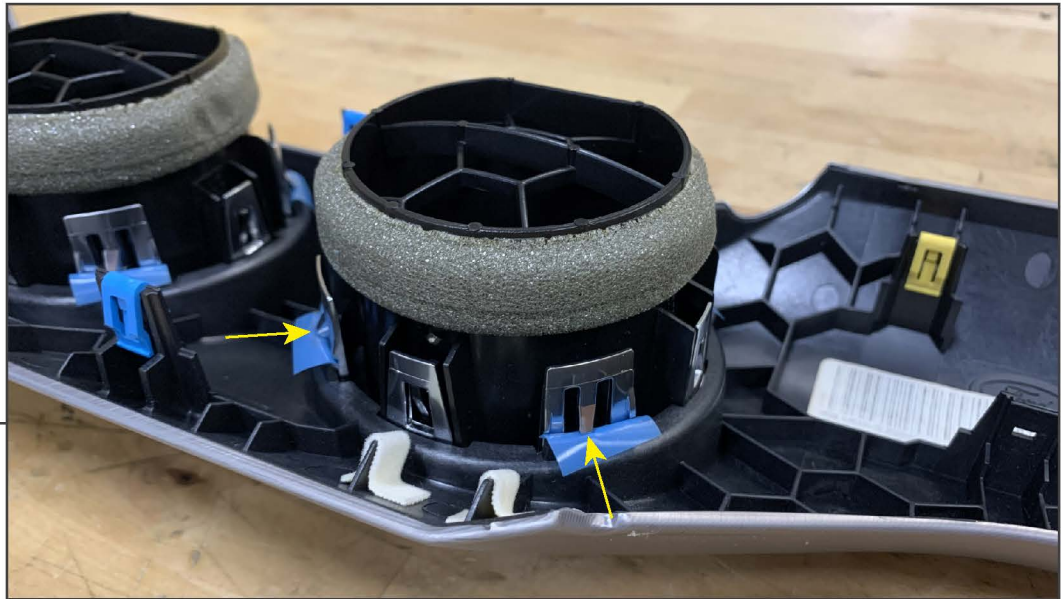

STEP 3

Using a small flathead screwdriver, gently pry the (4) plastic tabs on the OEM air vents, and push the vents through the face of the dashboard panel.

Repeat this step for all dashboard panel air vents.



STEP 4

Fit the new dashboard air vents through the face of the panel, and press into place until the retaining tabs lock into place.

Note: The air vents can only be installed in one direction.

STEP 5




Press the LED harness into each air vent housing. The connector will snap into place when secure.

STEP 6



Begin to re-assemble the vehicle dashboard. Route the wiring harness along the dashboard panel towards the passenger side, then towards the passenger side floor mounted fuse box.

STEP 7

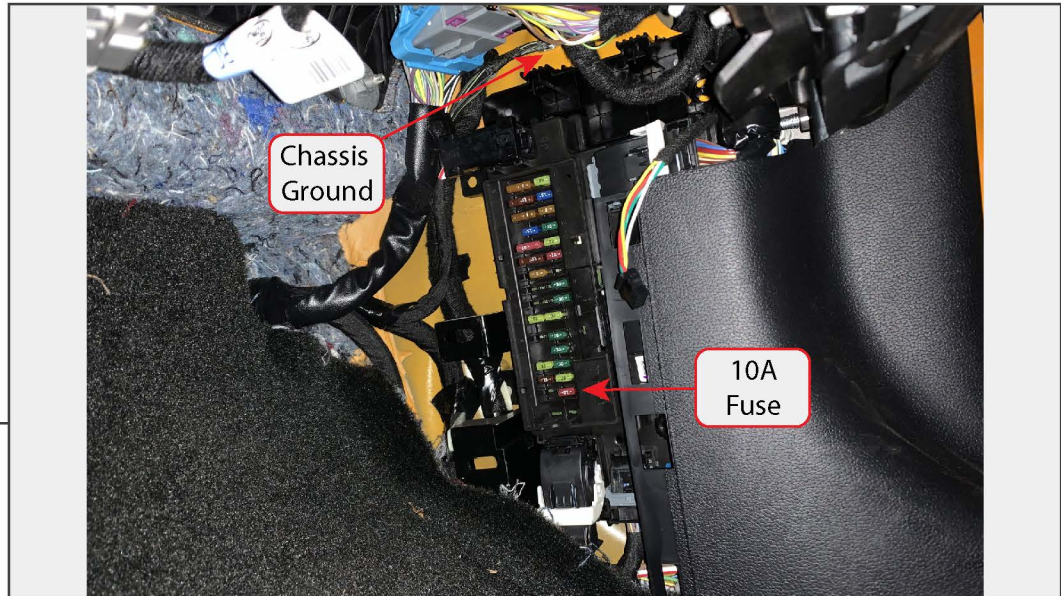

Remove the trim panel covering the vehicle fuse box. Locate and remove the 10A fuse at the bottom of the fuse box. Connect the RED wire on the RGB module to the included fuse tap. Fit the 10A fuse into the fuse tap along with the included fuse. Install the fuse tap into the 10A fuse slot. Install the black wire on the RGB module to the chassis ground above the fuse box. The air vents will only power on with key-on power.

STEP 8



Route the button ribbon cable to the desired vehicle mounting point. Clean the desired mounting point on the vehicle using isopropyl alcohol and a microfiber cloth. Peel the tape backing and adhere the buttons to the vehicle.

Red: Color Change
Yellow: Brightness & Power On/Off
Green: Different Color Changing Modes



STEP 9

To change airflow, twist the center of the air vent 90 degrees to open/close the air vent.

Installation is now complete.