

LED TAIL LIGHTS

(2013-2014 MUSTANG)

INSTALLATION INSTRUCTIONS


CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light

TOOLS REQUIRED


11mm Deep Socket Or Wrench Flat-Head Screwdriver Or Trim Removal Tool



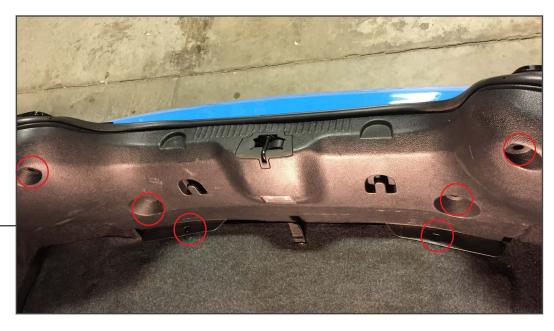

STEP 1


Open the trunk and remove the plastic trunk liner by removing the (6) clips securing it to the vehicle.

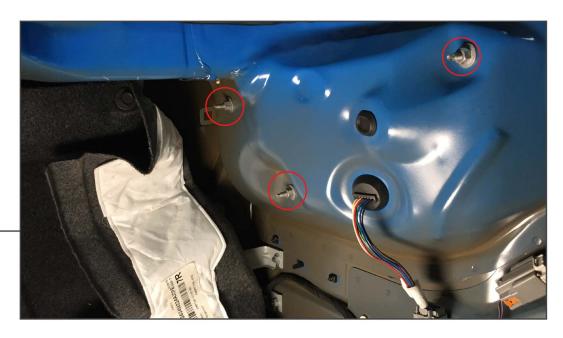

STEP 2


Remove the (3) 11mm nuts holding the factory tail light to the vehicle.



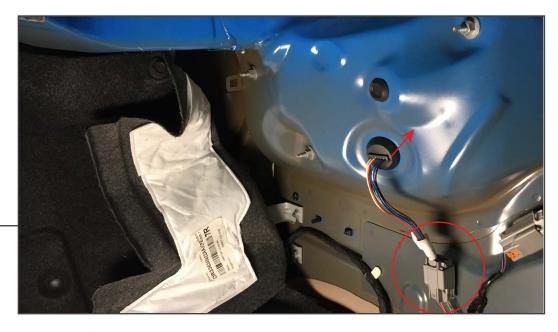

STEP 3


Unplug the taillight harness from the main connector, and pull the grommet and harness through the body hole. Remove tail light from the vehicle.

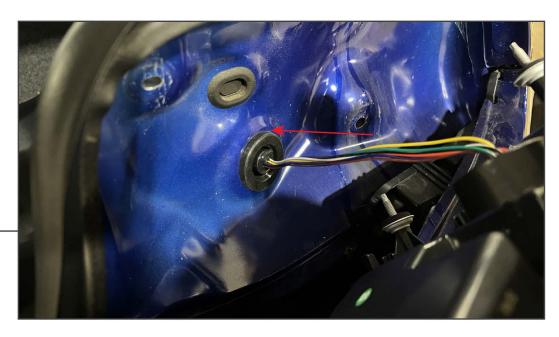

STEP 4

While holding the new tail light, press the wiring harness and grommet through the vehicle body hole. Press the grommet until the grommet locks into place.



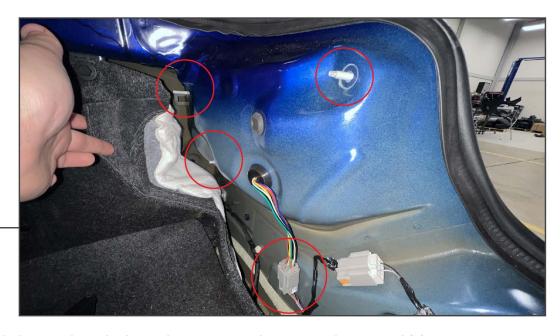

STEP 5

Fit the new tail light into the vehicle, and secure into place using the original (3) 11mm nuts.



STEP 6

Installation is now complete.