

SEQUENTIAL TAIL LIGHT HARNESS

(1996-2004 MUSTANG - EXCL. 99-01 COBRA)

INSTALLATION INSTRUCTIONS


CONTENTS

(2) Tail Light Harness

TOOLS REQUIRED

11mm Deep Socket
Ratchet
Panel Removal Tool

STEP 1

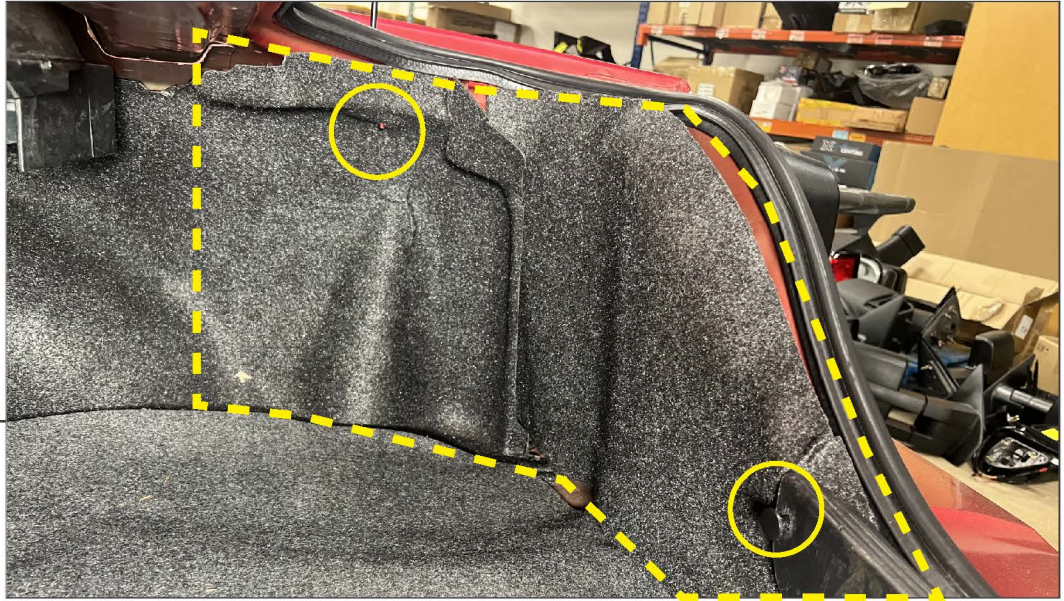


Open the vehicle trunk, and locate the plastic fasteners securing the trunk liners to the vehicle. Remove the fasteners using a pry tool, and move the liners away from the rear of the vehicle to reveal the tail light mounting hardware.

STEP 2



Unplug the tail light harness by lifting the black tab, and pulling the harness away from the vehicle body harness.


STEP 3

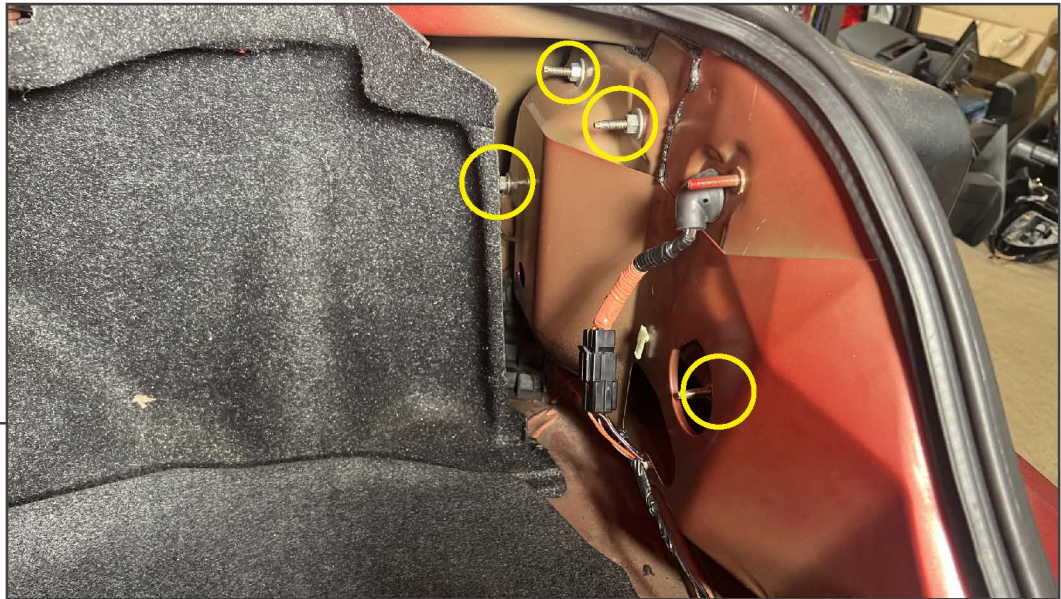

Remove (4) 11mm nuts from the tail light mounting studs.

Pull the tail light assembly away from the vehicle body, and place on a soft workable surface facing downwards to remove the wiring harness.

STEP 4

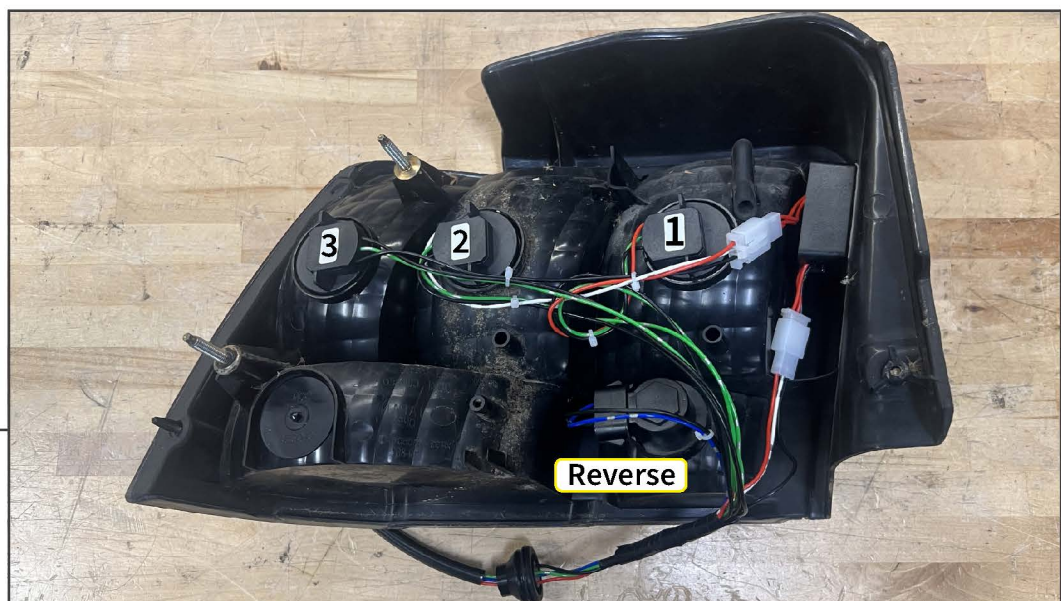

Remove the light bulb sockets from the housing, and remove the harness from the back of the tail light.

Transfer the light bulbs to the new harness. Use the diagram above to identify the location of each light socket, and secure to the tail light housing. Secure the sequential module to the inside of the light housing using the attached double sided tape.

STEP 5



Re-install the tail light to the vehicle following Steps 1-3 in reverse order.

Repeat Steps 1-5 for the remaining tail light. If desired, the sequence can be slowed down with the use of the modified flasher, part # 99032 [halogen bulbs] / 388878 [LED bulbs].

Installation is now complete.