

CHALLENGER REAR SPOILERS

(2008-2020 CHALLENGER)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Spoiler
- (5) Alignment Strips
- (2) Phillips Screws
- (2) Flat Washers
- (3) Alignment Pins
- (3) Plastic Grommets
- (2) Rubber Pads

TOOLS REQUIRED

10mm Socket

Ratchet

Plastic Pry Tool

Phillips Screwdriver

Drill

1/8", 5/16", And 15/32" Drill Bits

Pliers

Masking Tape

Exterior Detailer/Isopropyl

Alcohol




STEP 1

Remove the (2) 10mm nuts securing the spoiler to the trunk.



STEP 2


Lower the trunk lid. Using a plastic pry tool, pry around the spoiler to loosen the double sided tape. Remove the spoiler from the vehicle.

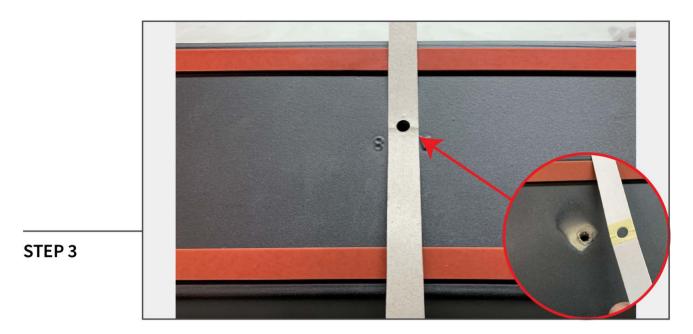

Adhere the provided (5) Alignment Strips to the spoiler. Peel the adhesive backing off the middle of the strip, then align the hole in the strip with the hole in the spoiler.




Align the middle strip with the trunk release button on the spoiler. Using masking tape, adhere the (5) alignment strips to the trunk lid to secure them in place. Lift the spoiler away from the vehicle.

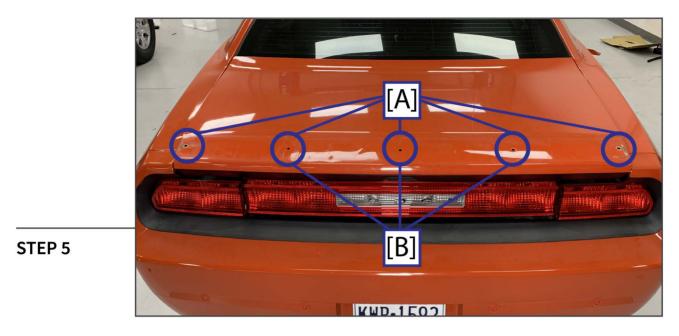

Drill (5) pilot holes using a 1/8" drill bit [A].


If replacing OE-Spoiler, drill (3) pilot holes using a 1/8" drill bit [B].

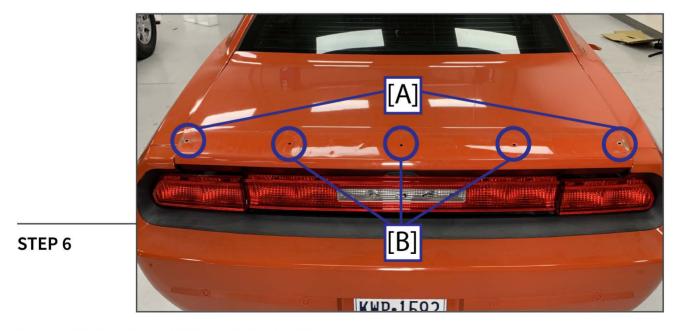

Using a 5/16" drill bit, drill holes indicated [A].

Using a 15/32" drill bit, drill holes indicated [B].

STEP 8

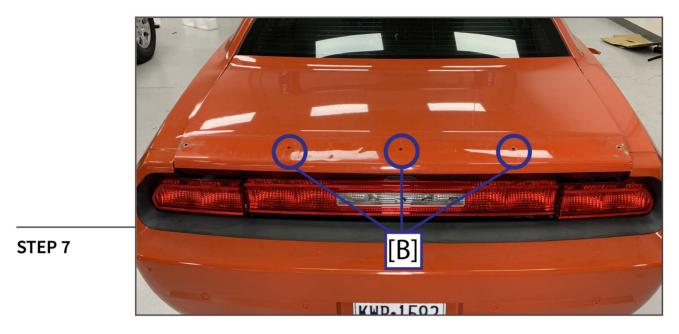

Insert (3) Plastic Grommets into the drilled holes indicated [B]



Install (3) Alignment Pins into the spoiler. Thread them in by hand and snug tight with pliers.



STEP 9

Peel back the double sided tape underneath the spoiler, then install the spoiler onto the trunk lid. Place the (3) spoiler alignment pins into the (3) plastic grommets installed in the trunk lid. Press firmly along the spoiler to adhere the tape to the trunk lid.



STEP 10

Install the (2) provided Phillips screws into the spoiler through the ends of the trunk lid.

Installation is now complete.