



QUARTER WINDOW LOUVER

(2008-2020 DODGE, CHALLENGER)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Louver
- (1) RH Louver
- (1) Roll of Tape

TOOLS REQUIRED

- Microfiber Towel
- Windex
- Isopropyl Alcohol


SKU # CH4982/CH4983

STEP 1



Wash the quarter window with soap and water. Allow the window and surrounding area to dry.
**Recommended: Wipe the window down with isopropyl alcohol to ensure the cleanest surface possible.

STEP 2

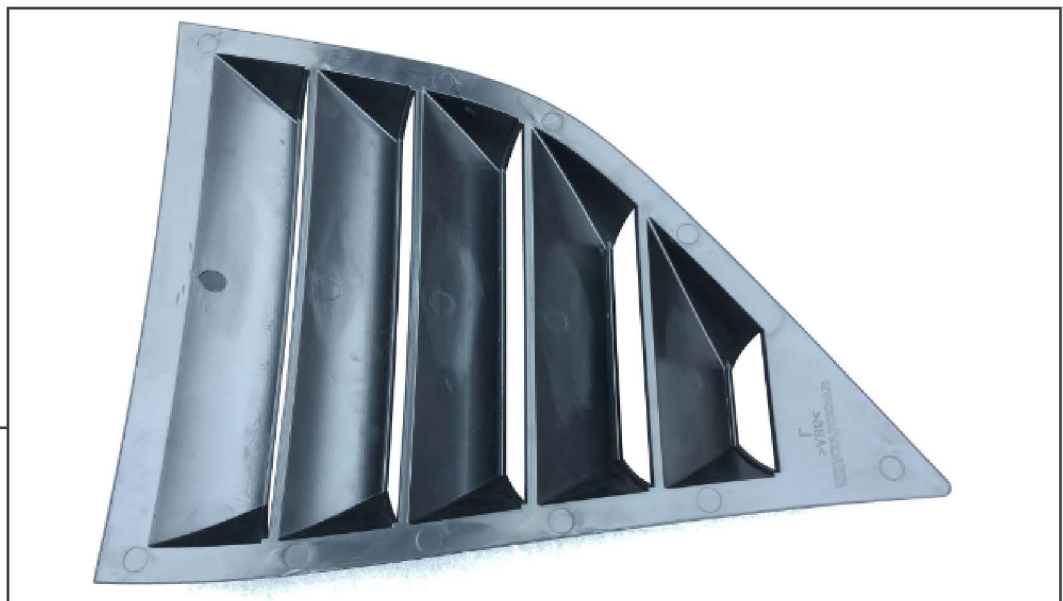

Apply the supplier 3M double sided tape around the outside edge of the louver. Prior to removing the tape back, test fit the louver to familiarize yourself with how it fit.



STEP 3

Remove the tape backing, align the louver to the window and press it on.



STEP 4

Apply firm even pressure to all taped surfaces to ensure proper adhesion. Install is now complete.