

LED TURN SIGNALS

(2015-2017 MUSTANG)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Turn Signal Assembly
- (1) RH Turn Signal Assembly

TOOLS REQUIRED

5.5, 7, 8, 10mm Sockets Ratchet Panel Removal Tool






Remove the (8) clips securing the plastic radiator cover to the radiator support and remove it from the vehicle.



STEP 2

Remove the (6) 8mm and (2) 5.5mm bolts securing the bumper cover to the radiator support.



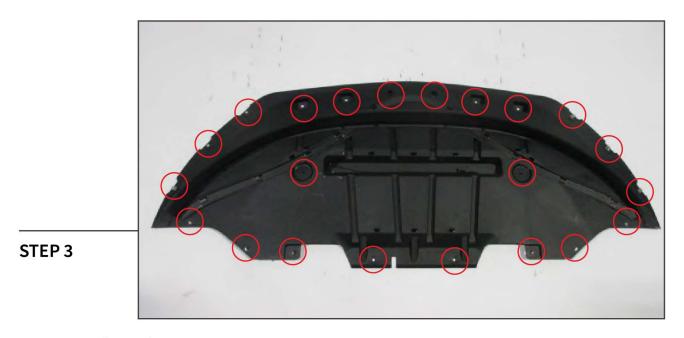


Support the front of the vehicle to access the bumper splash shield.

Note: There are two versions of the splash shield. Both are attached to similar locations.



On each side of the bumper, remove the plastic clips holding the fender liner to the bumper.



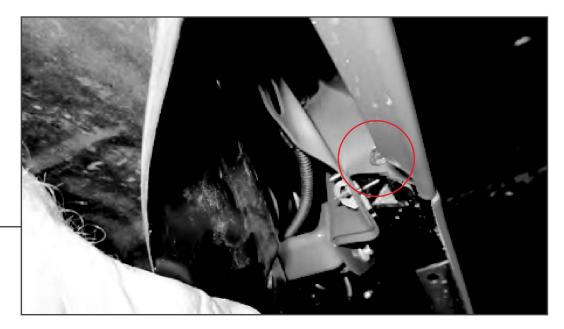

Fold back the fender liner so that you can access the (1) bolt that holds the bumper to the fender on each side. Once removed, firmly pull the sides of the bumper away from the fender.



STEP 6

With the splash shield pulled back, you can access the plugs for the turn signals and fog lights. Unplug the lighting connectors, and then remove the bumper from the vehicle.





Remove (3) 7mm screws securing the fog light to the fog light bezel. Remove the fog light from the bezel.



STEP 8

Remove the (6) 7mm screws securing the fog light bezel to the bumper. Carefully pry on the plastic tabs to release the bezel from the bumper. Remove the bezel from the bumper.





Remove the (3) 7mm screws securing the factory turn signal light to the fog light bezel. Remove the turn signal light.

Install the new LED turn signal light using the original turn signal light hardware. Secure the resistor module to the inside of the bumper.



STEP 10

Follow steps 1-8 in reverse order to re-assemble the vehicle front bumper.

Installation is now complete.